Fig. 1



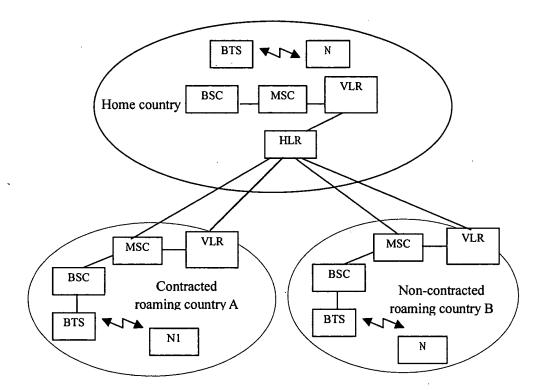


Fig.2

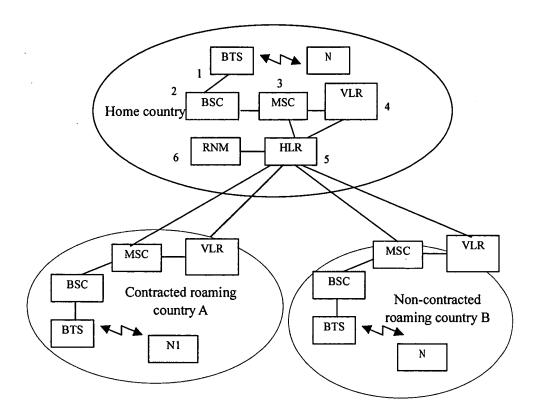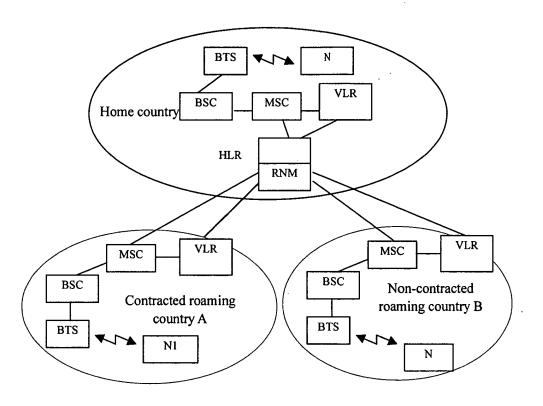

í

Fig.3



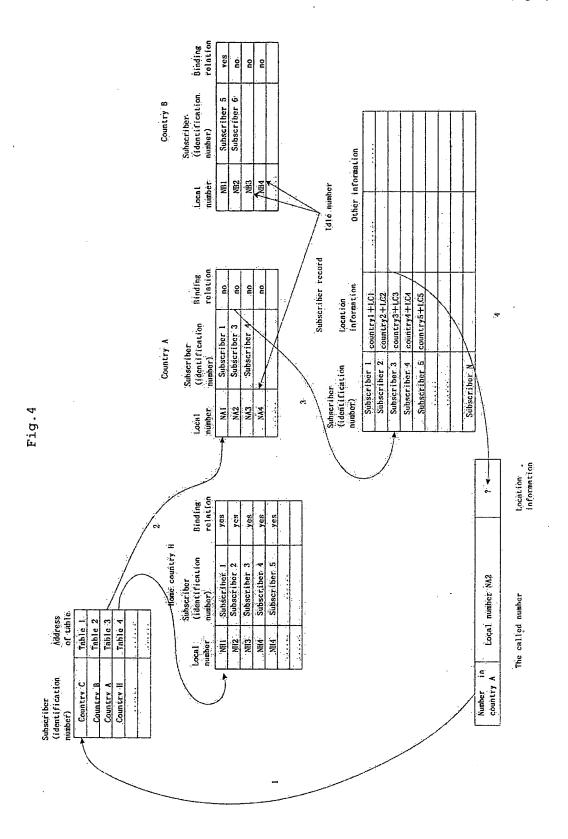


Fig.5

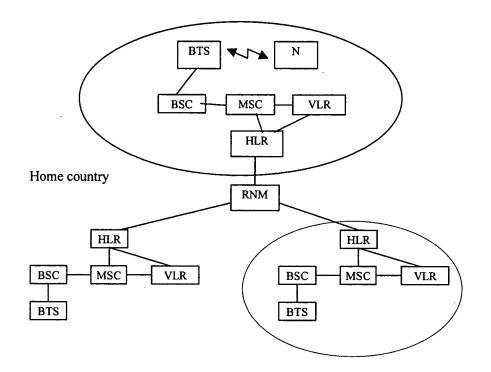


Fig.6

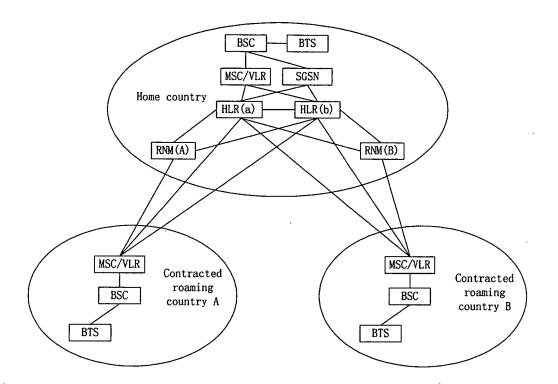


Fig.7

Configure RNM with numbers in the contracted roaming region/network, independent PSTN/ISDN number and signaling point code

1

Configure data in the entities of the contracted roaming region/network and entities of the home region/network, so that the subscriber location inquiry message taking the local number in the subscriber's roaming region/network as the destination address will direct to RNM in the subscriber's home network

establish interfaces between the RNM and entities of the contracted roaming region/network as well as between the RNM and entities of the home network

3

the subscriber utilize the configuration in respective entities of the contracted roaming region/network and the home network to develop communication services in the roaming region/network, implements localized roaming of the subscriber

Fig.8

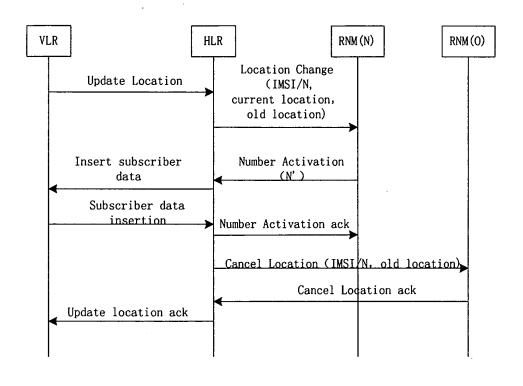


Fig.9

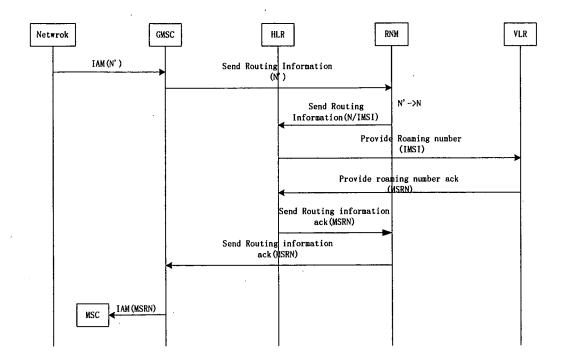


Fig.10

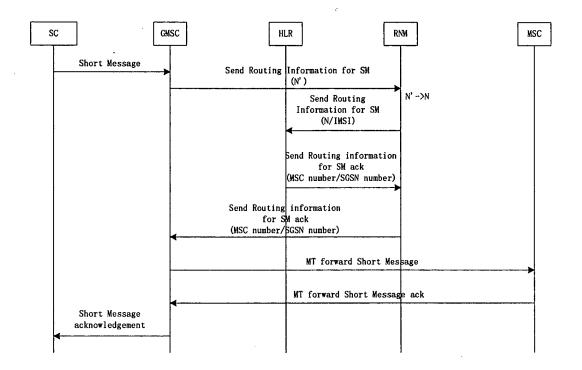


Fig.11

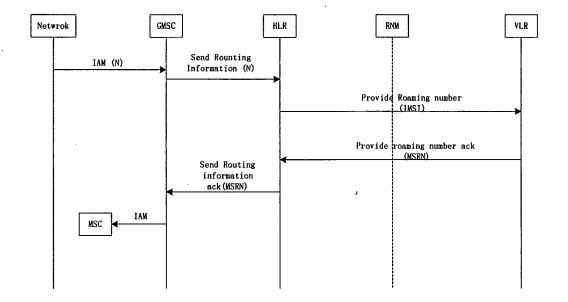


Fig.12

